

Fig. 1

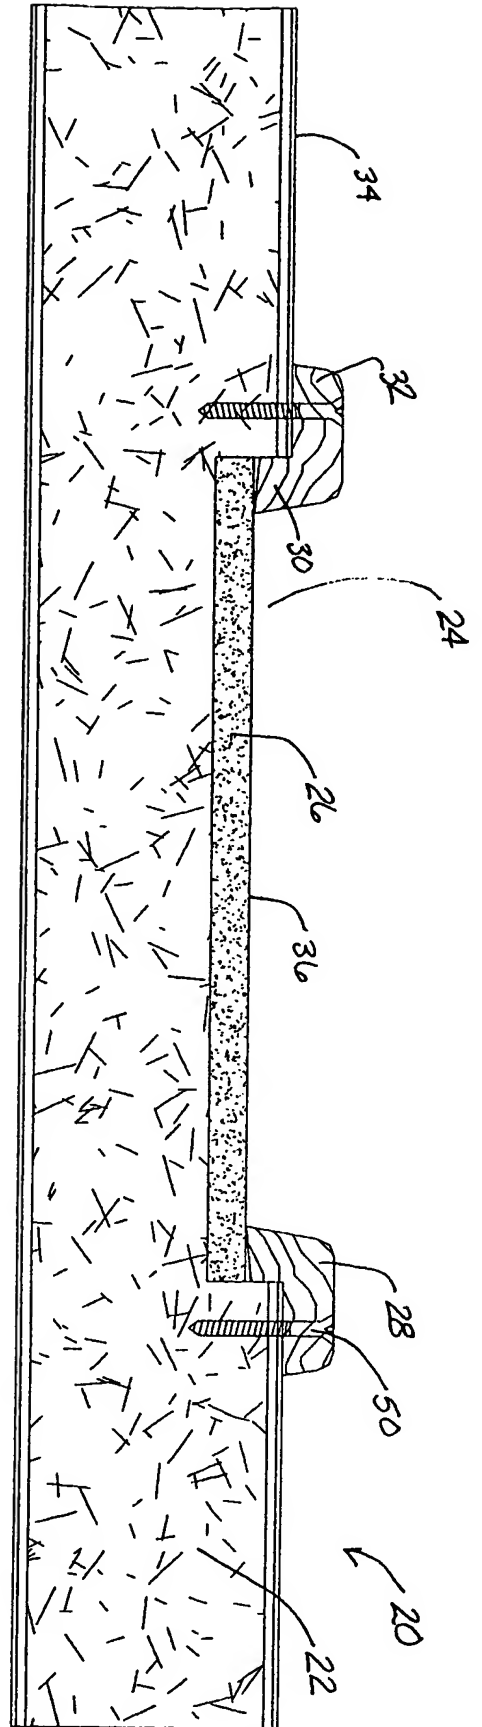
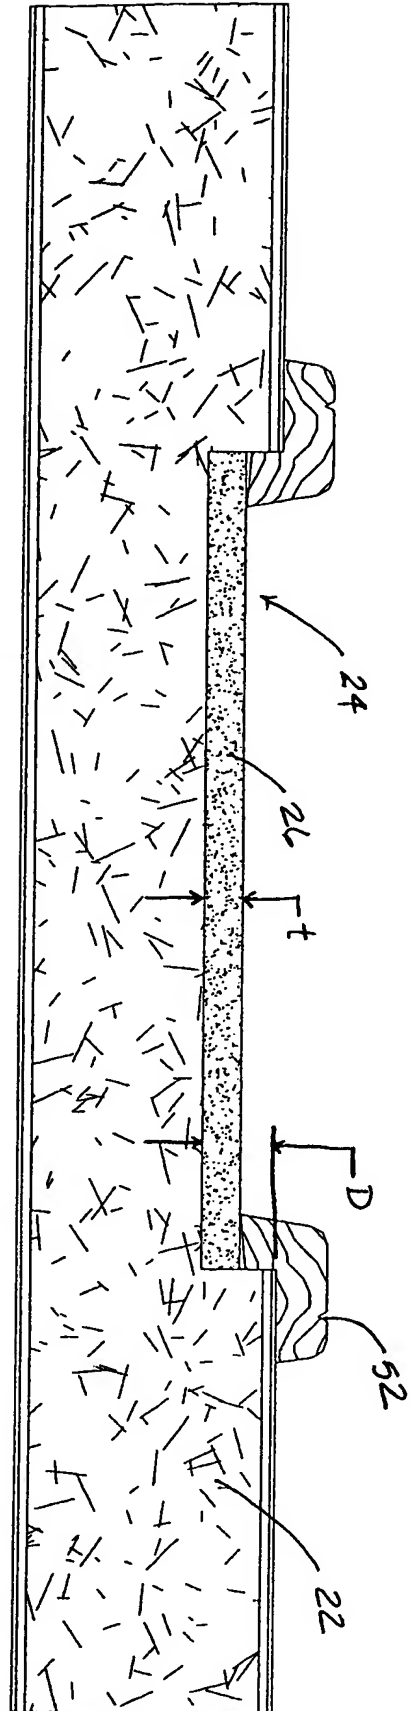


Fig. 2

Fig. 3



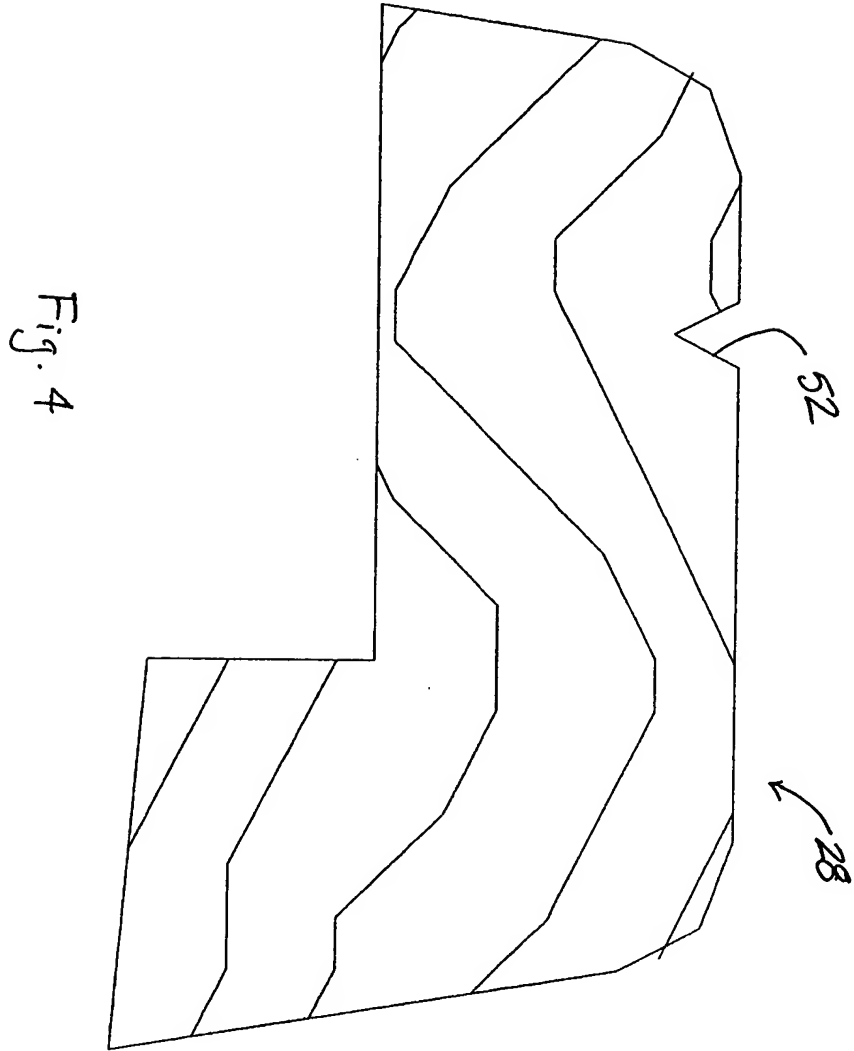
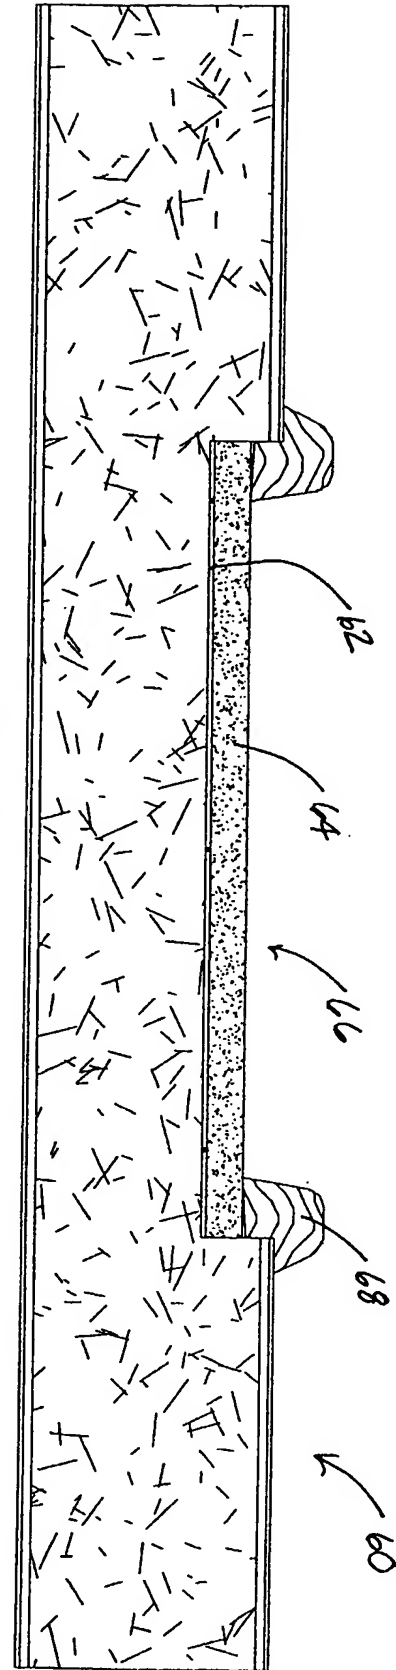


Fig. 5



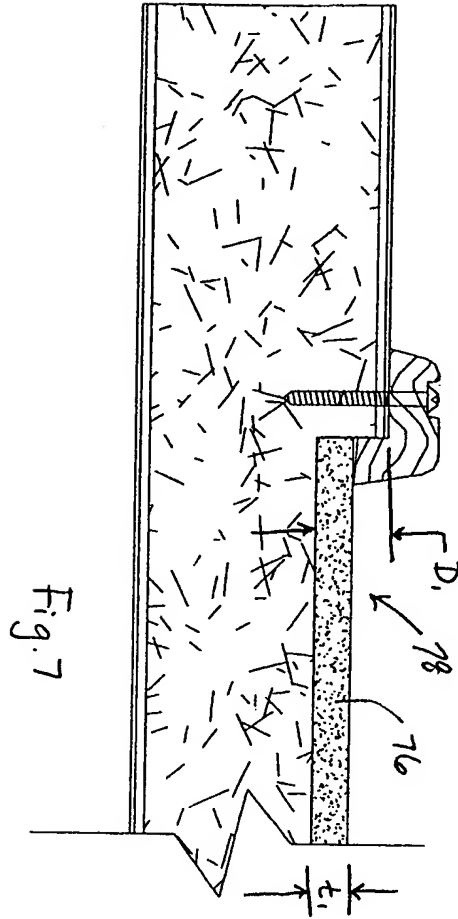
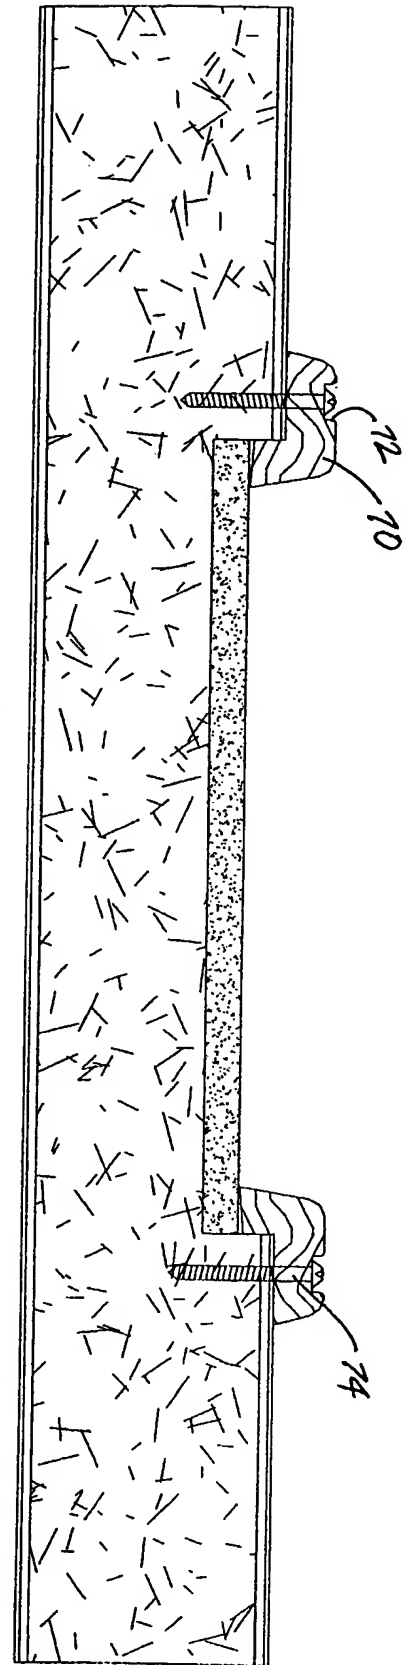


Fig. 9

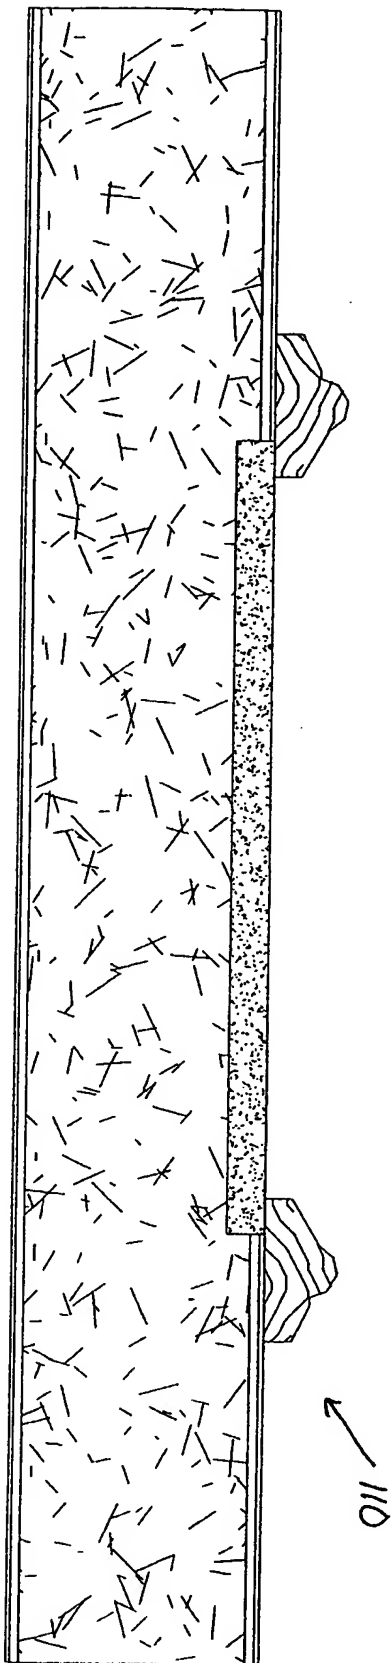
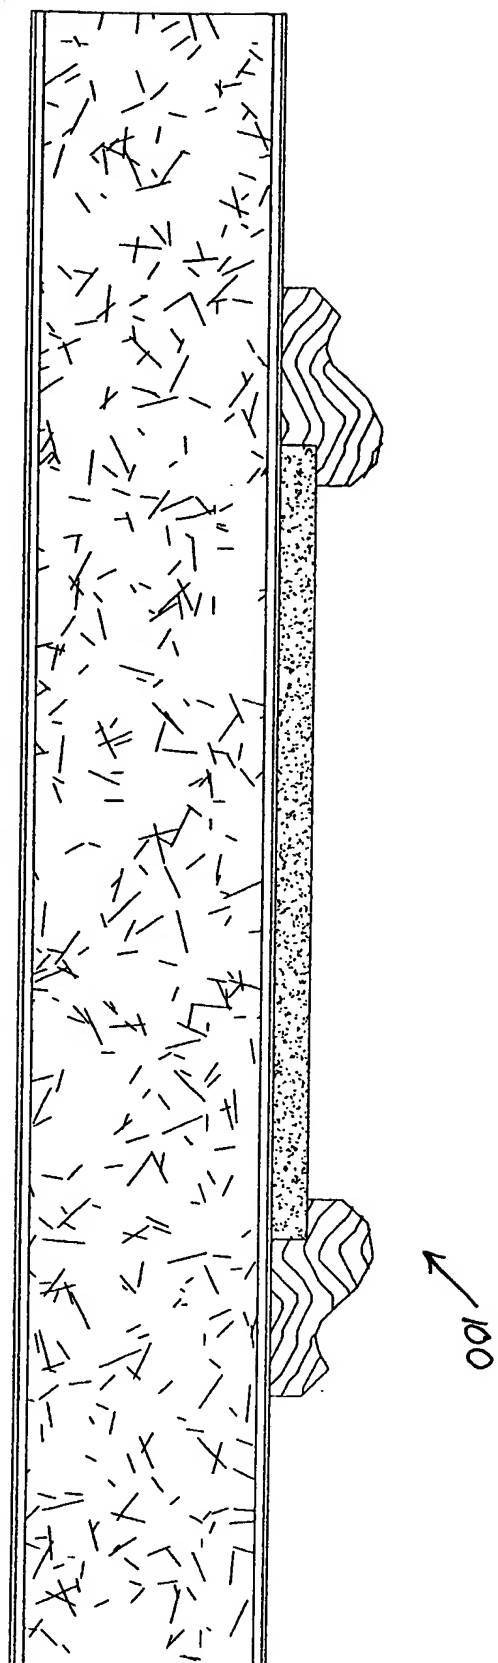
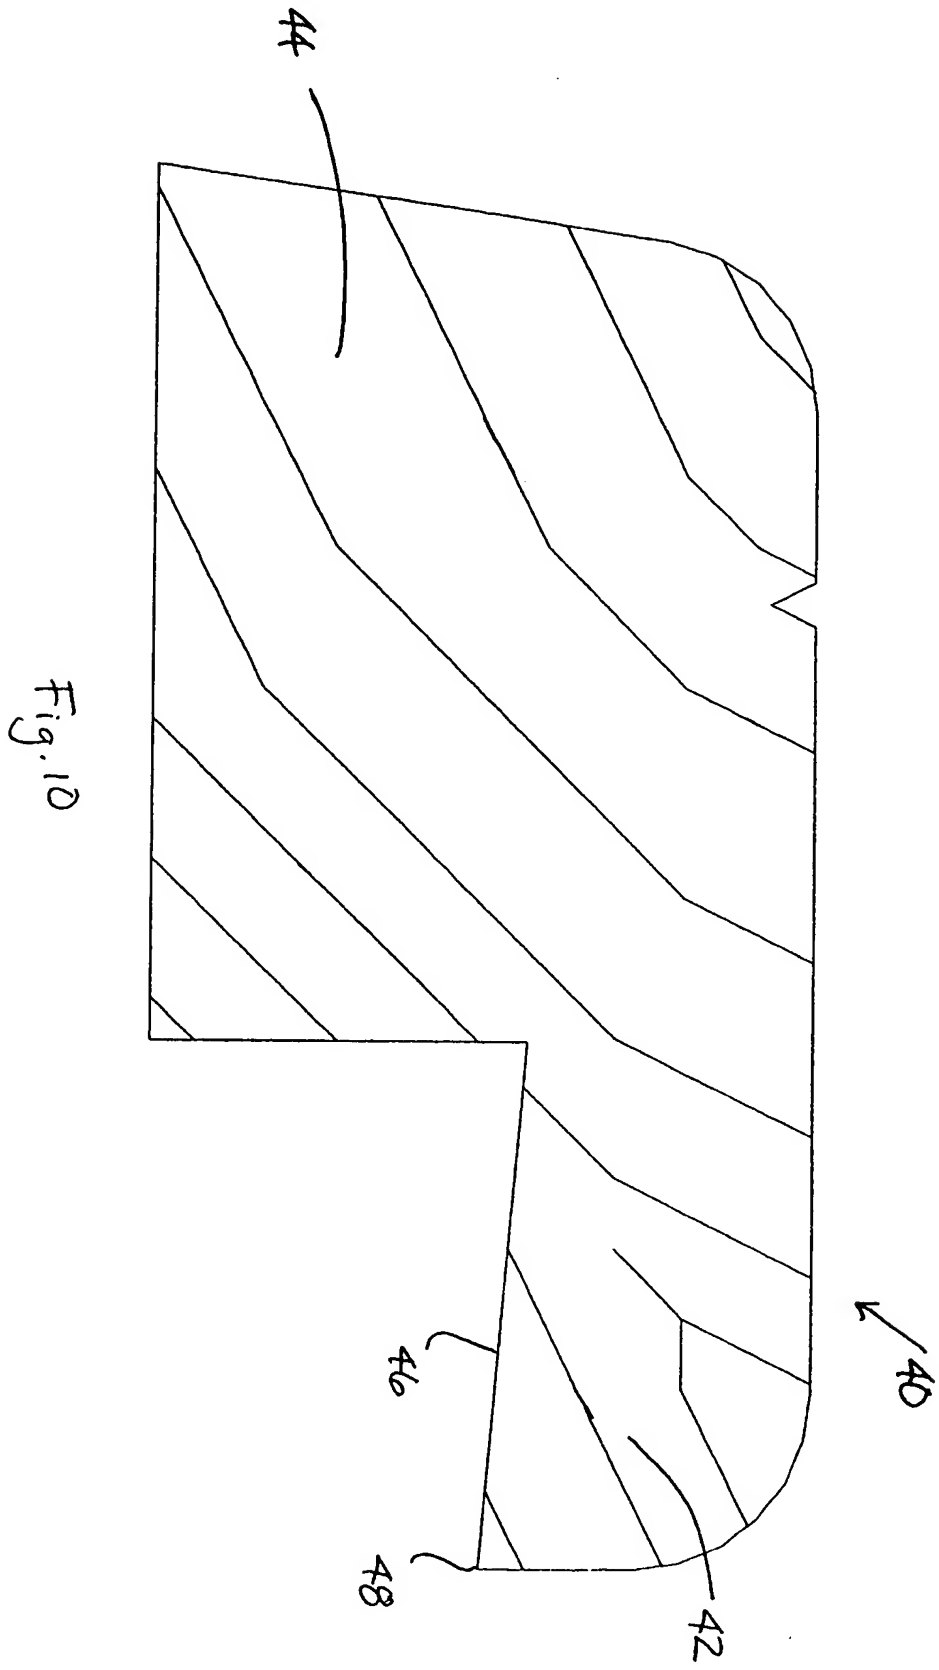


Fig. 8







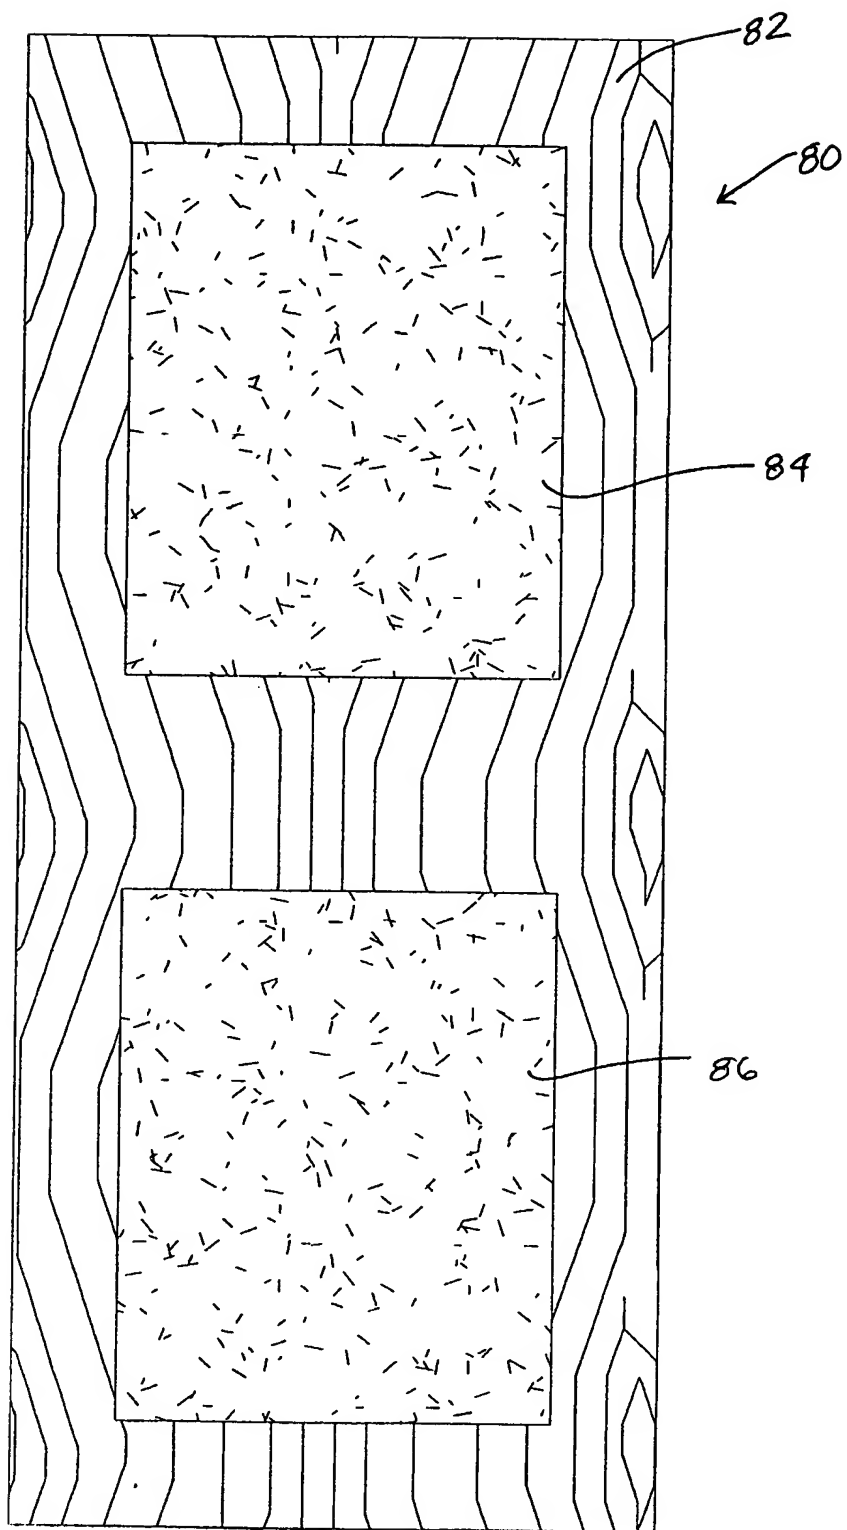
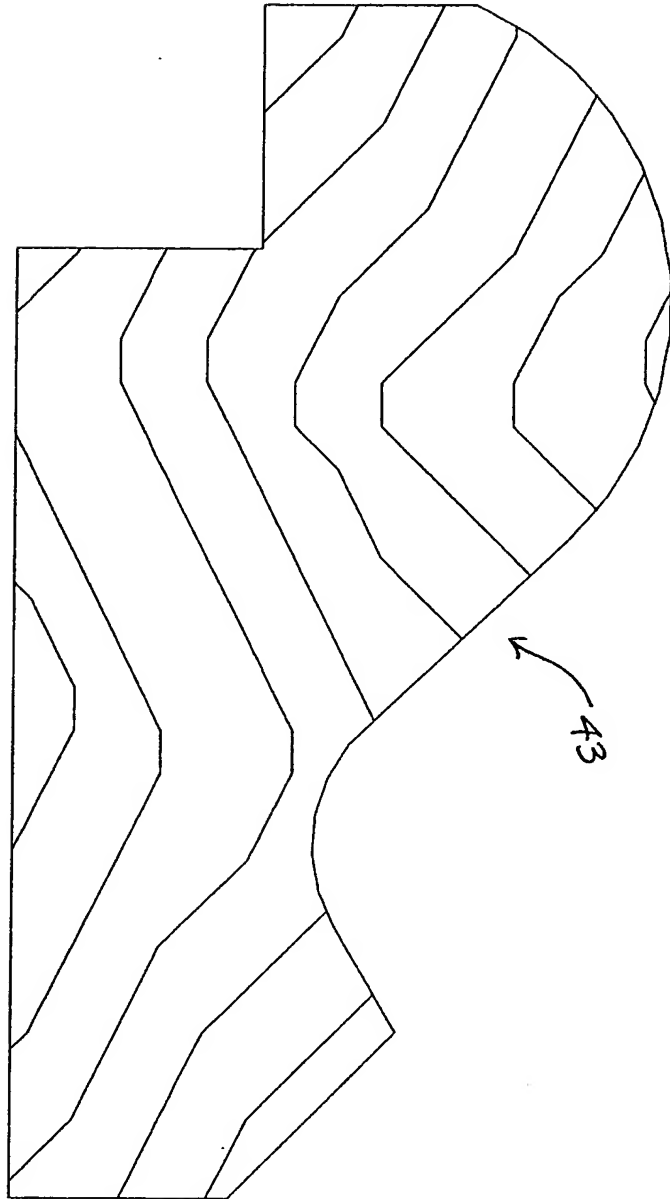


Fig. 11

Fig. 12



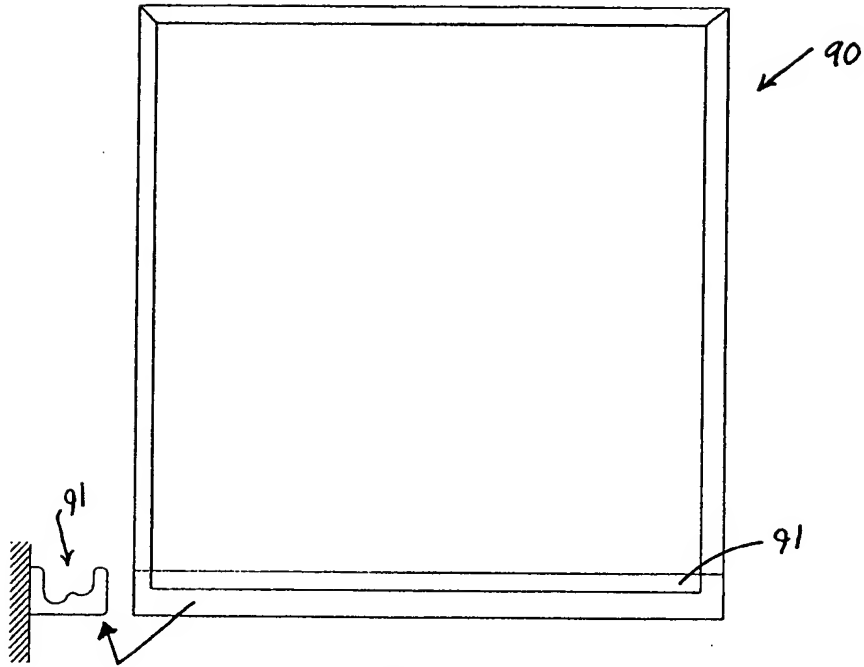


Fig. 13a


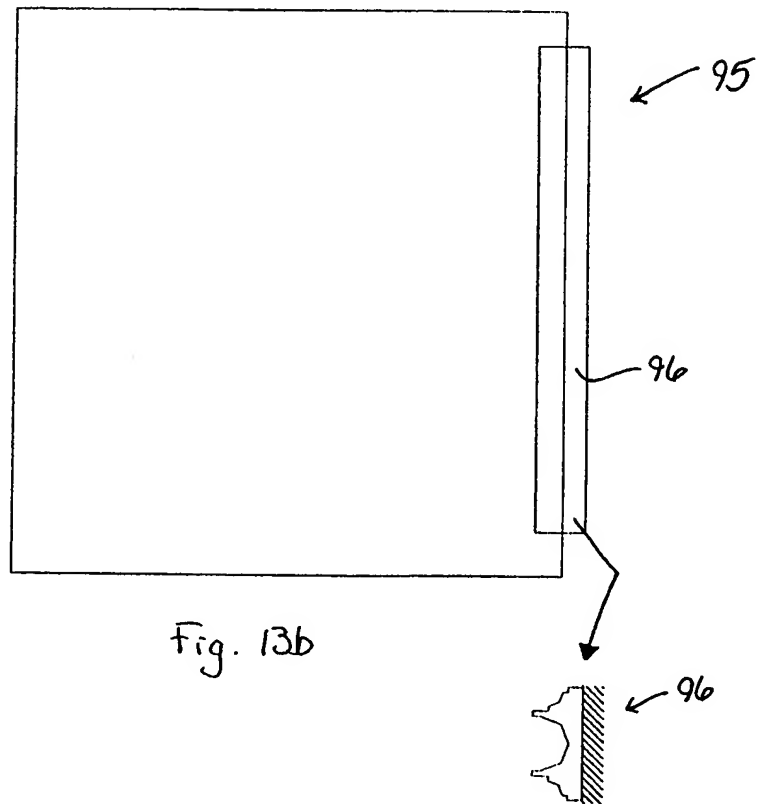



Fig. 13b

Fig. 14

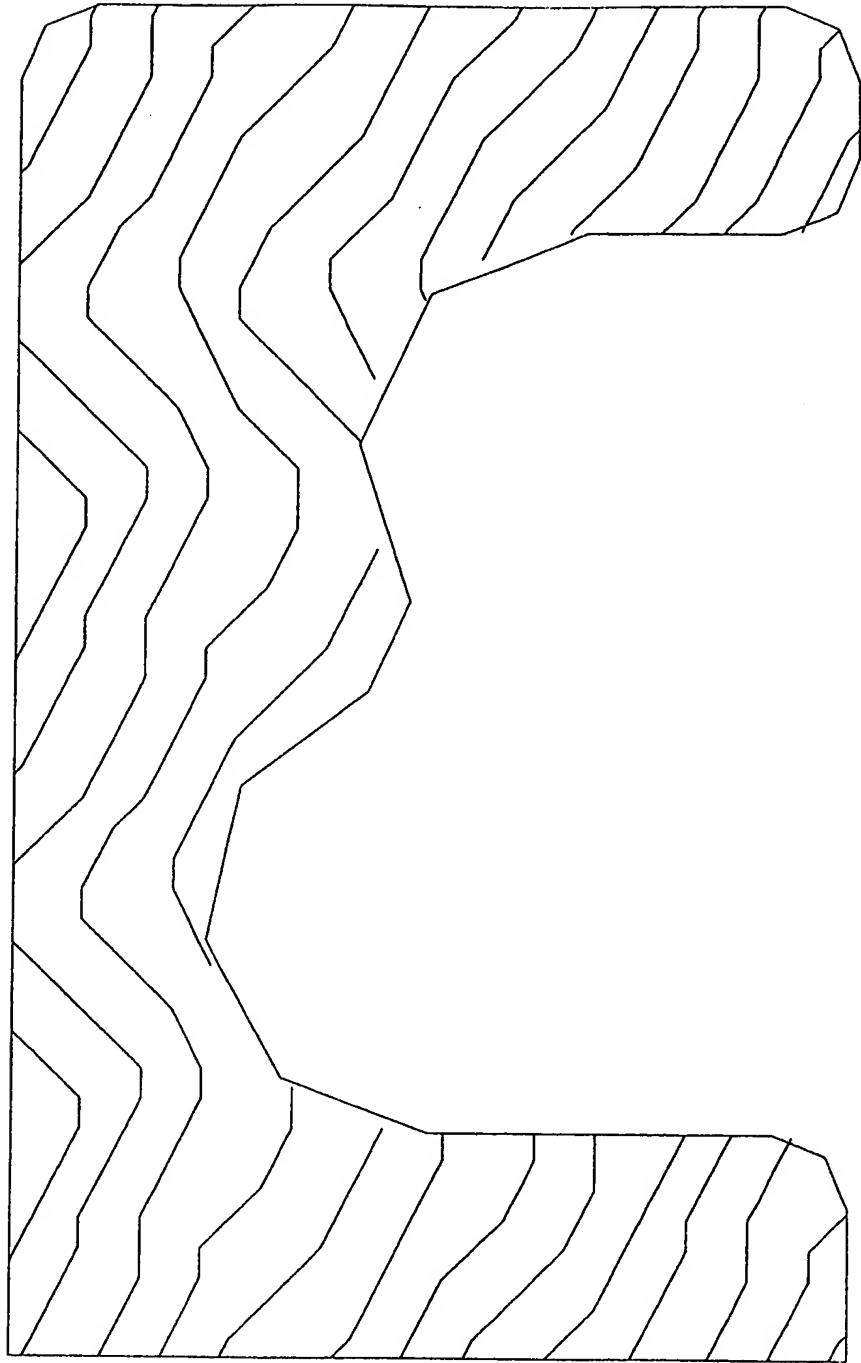

92

Fig. 15

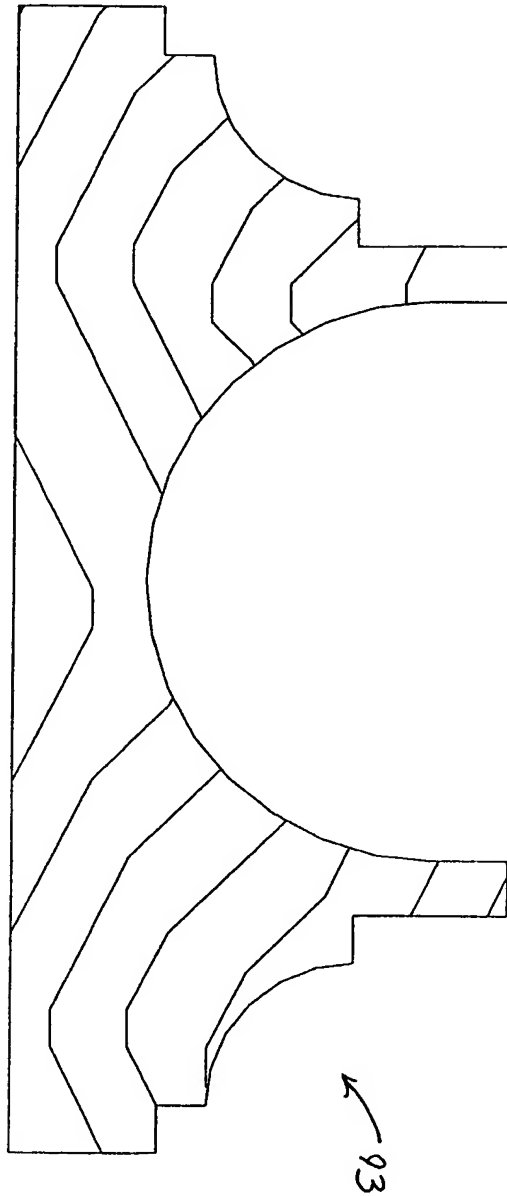

### NON-RATED (DPC-1) and 20-MINUTE (DFP-20)

**Rev. 09-17-02**

Fig. 16a

**Marshfield DoorSystems, Inc.**  
**Marshfield Signature Series™**  
**Workable Surfaces™ Door**  
**Neutral Pressure**

Applicant: Daniel E. Patridge  
 Serial No.: To Be Assigned  
 Filed: Herewith  
 For: A METHOD OF PROVIDING A PRODUCT LINE OF DOORS  
 Docket #: MDR0002/US  
 Date Mailed: July 8, 2003  
 Express Mail No. EV331042600US  
 Sheet 15 of 16

NON-RATED (DPC-1) and 20-MINUTE (DFP-20)


Rev. 09-17-02

Factory Finish (16)	Clear or stain with satin gloss Enviroclad UV™ finish
Warranty	Door – Full; life of original installation (1) Workable Surfaces – Free from Defect
Security Rating	Workable Surfaces Doors have not been tested for Security Rating
Acoustic Rating	Workable Surfaces Doors have not been tested for Acoustic Properties

**NOTES:**

- (1) Use of Marshfield DoorSystems, Inc. doors in exterior applications is not recommended and not warranted.
- (2) Fire retardant stiles eliminate the need for metal edge and astragal.
- (3) 2-ply full outer stile available.
- (4) Laminated Strand Lumber (LSL) or hardwood at mill option.
- (5) Wider rails available.
- (6) Bottom rails are a minimum 2-1/2" in doors requiring deep mortise machining for closers, holders, pivots, bottom seals, etc.
- (7) Marshfield DoorSystems, Inc. does not assume responsibility for choice of glazing materials used. Refer to Consumer Product Safety Commission 16 CFR 1201 CAT. II (1-1-97 Edition) to determine the need for safety-rated glazing.
- (8) Lites will be allowed up to 110" in length on DPC-1 doors but will not be covered by the Marshfield DoorSystems, Inc. warranty.
- (9) Minimum 5" from lite to any edge or adjacent openings, including hardware cutouts.
- (10) If 1/4" wired glass is used in doors that are shipping to Canada or anywhere that requires hose stream testing, Trim-Lite™ moulding is required.
- (11) Minimum 5-1/2" from lite to any edge or adjacent openings, including hardware cutouts.
- (12) On Non-rated (DPC-1) doors, the minimum distance requirement is 5" from the Workable Surface profile to any door edge, lite opening, or hardware cutout.
- (13) On Rated (DFP-20) doors, the minimum distance requirement is 5-1/2" from the Workable Surface profile to any door edge, lite opening, or hardware cutout.
- (14) All fire-rated doors must be machined by Marshfield DoorSystems, Inc. or other approved fire door machiners. Factory machining of surface-mounted exit devices with face holes 1" and larger is available.
- (15) Viewers or raceways are not available on Workable Surface doors.
- (16) All colors may not be available.


**Cross Sectional View of Workable Surfaces Door**

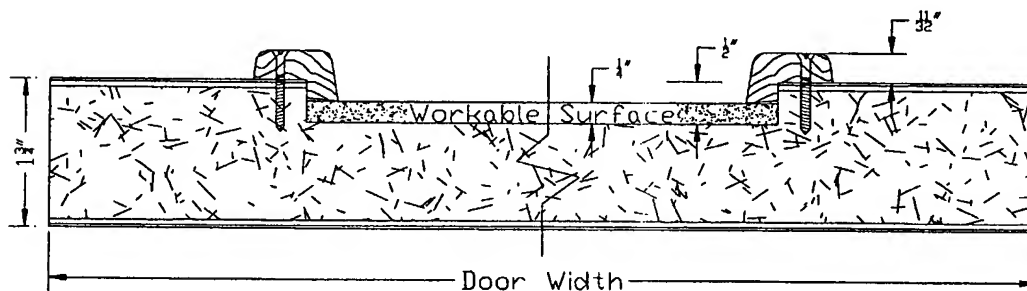

Note: Marshfield DoorSystems, Inc. doors are manufactured per the standards listed on this page. Specifications are subject to change without notice.

## Example of marketing literature for one product line of the present invention

### WORKABLE SURFACES

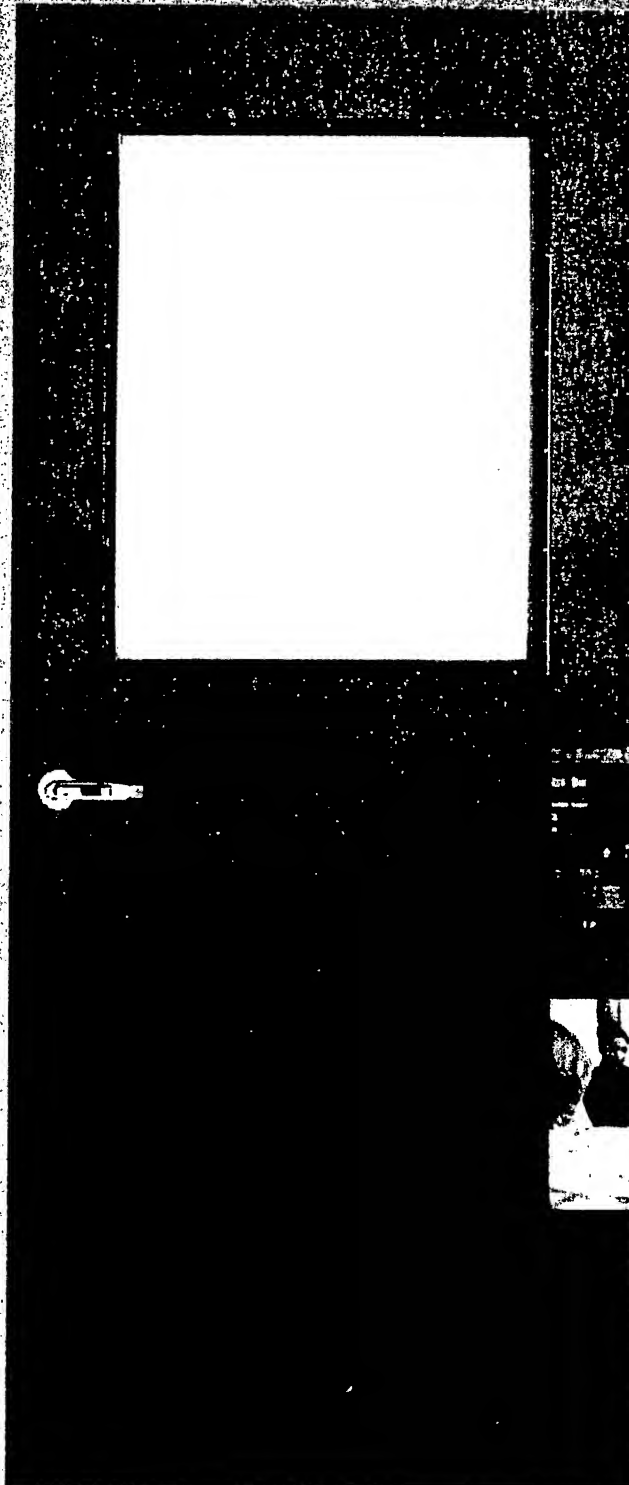

Maximizing the intended design function of any space, Workable Surfaces from Marshfield DoorSystems combine the beauty of a wood door with the usefulness of a presentation board, bulletin board or a mirror.

As part of the Marshfield Signature Series™, this new idea integrates a dry erase board, a corkboard or a mirror directly into the door's design. This helps create an organized, clean and functional workspace, which is ideal for offices, schools, hospitals, dorm rooms, hotels or anywhere space is at a premium.



Fig. 17

 **Marshfield**  
DoorSystems